




- Self etching Primer
- Primer Sealer
- Flexible Primer
- DTM "Direct to Metal"
- Primer Surfacer

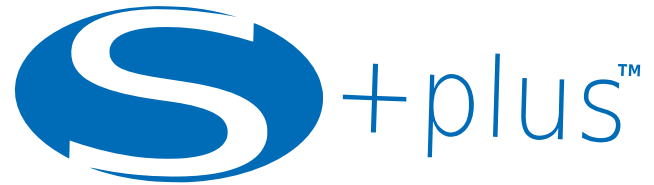

ADHESION PROMOTER

NO COMPETITOR A UNIQUE PRODUCT!

RTS

Ready to Spray

FEATURES OF S+PLUS 1K PRIMER WITH CB+PLUS

- SUPERIOR ADHESION FOR A STRONG AND LONG LASTING REPAIR.
- DOES NOT SHRINK OR PINHOLE WHICH SPEEDS UP THE REPAIR PROCESS.
- EXCELLENT SANDING AND FEATHER EDGE QUALITIES FOR FLAWLESS REPAIRS.
- SAVES TIME AND MONEY - NO ADHESION PROMOTER NECESSARY.
- MAKES PAINT STICK VEHICLE'S RIMS.

- **Tile & Ceramics**
- **Problematic Plastics**
- **PPO & LDPE**
- **Polypropylene**
- **Zinc & Magnesium**
- **Stainless Steel**
- **Aluminum & Glass**
- **Hot Dip Galvanized Steel**
- **Chrome Plating**
- **Leather & Vinyl**
- **Wood**




**SHAKE WELL BEFORE SPRAYING
SEE TDS FOR INFORMATION**


Why S+Plus RTS versus competitive products on the market?

NO COMPETITOR UNIQUE Product!

- **S+Plus RTS Primer with CB+Plus Adhesion promoter is many times stronger because a substantial portion of the oval molecule is making contact with the substrate.**
- **No reducer, Easy to apply:**
- **No Sanding or scuffing needed!**
- **Ready to paint in 15 minutes**
- **Compatible With WATER And SOLVENT Base-coats**

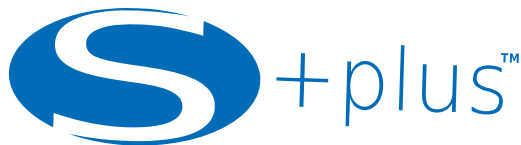

RTS
Ready to Spray

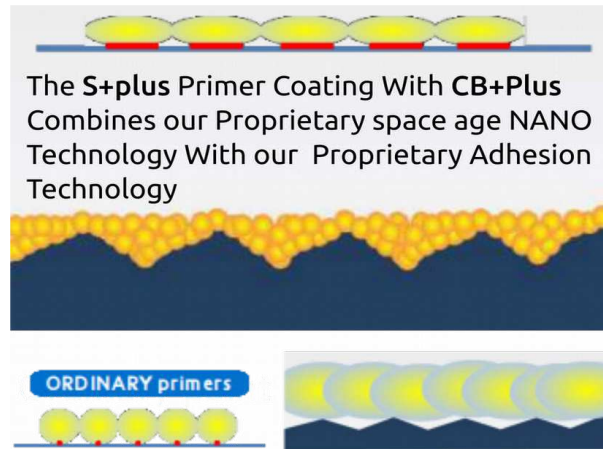

Application Instructions:

- 1) Clean substrate with soap and water followed by a VOC compliant surface cleaner. Thoroughly dry the parts. **DO NOT** apply any other cleaners.
- 2) Air Dry
- 3) Apply 2 medium coats
- 4) Wet sand with 320, 400 and 600 if it is a solid color and 800 if a metallic color.
- 5) Apply finish as per paint manufacturer's instructions.

HB6965 S+PLUS RTS 1 Gal. (SCAQMD) RULE:1150 COMPLIANT!
2 -1 Gal/Case, Wt.: 16 Lbs (7.2 kg), Dim.: 13.1/8"x6.5"x7.75"

HB6966 S+PLUS RTS 1/4 Gal. (SCAQMD) RULE:1150 COMPLIANT!
6 -Quarts/Case, Wt.: 12.5 Lbs (5.6 kg), Dim.: 13.5"x9"x5"

HB6967 S+PLUS RTS (SCAQMD) & RULE:1150 COMPLIANT!
4- 200 Liter, Drums/Pallet Wt.: 1600 Lbs (725 kg), Dim.: 42" x 42"